

FIG. 1

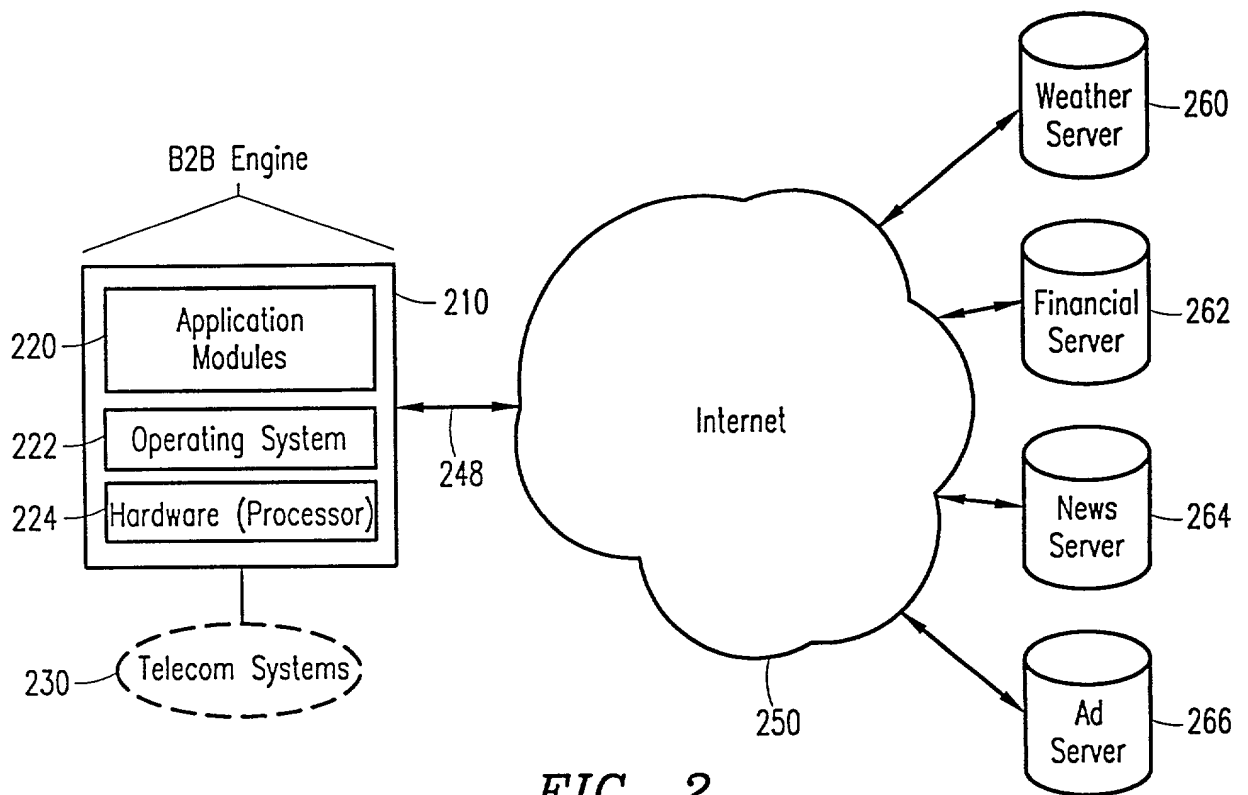


FIG. 2

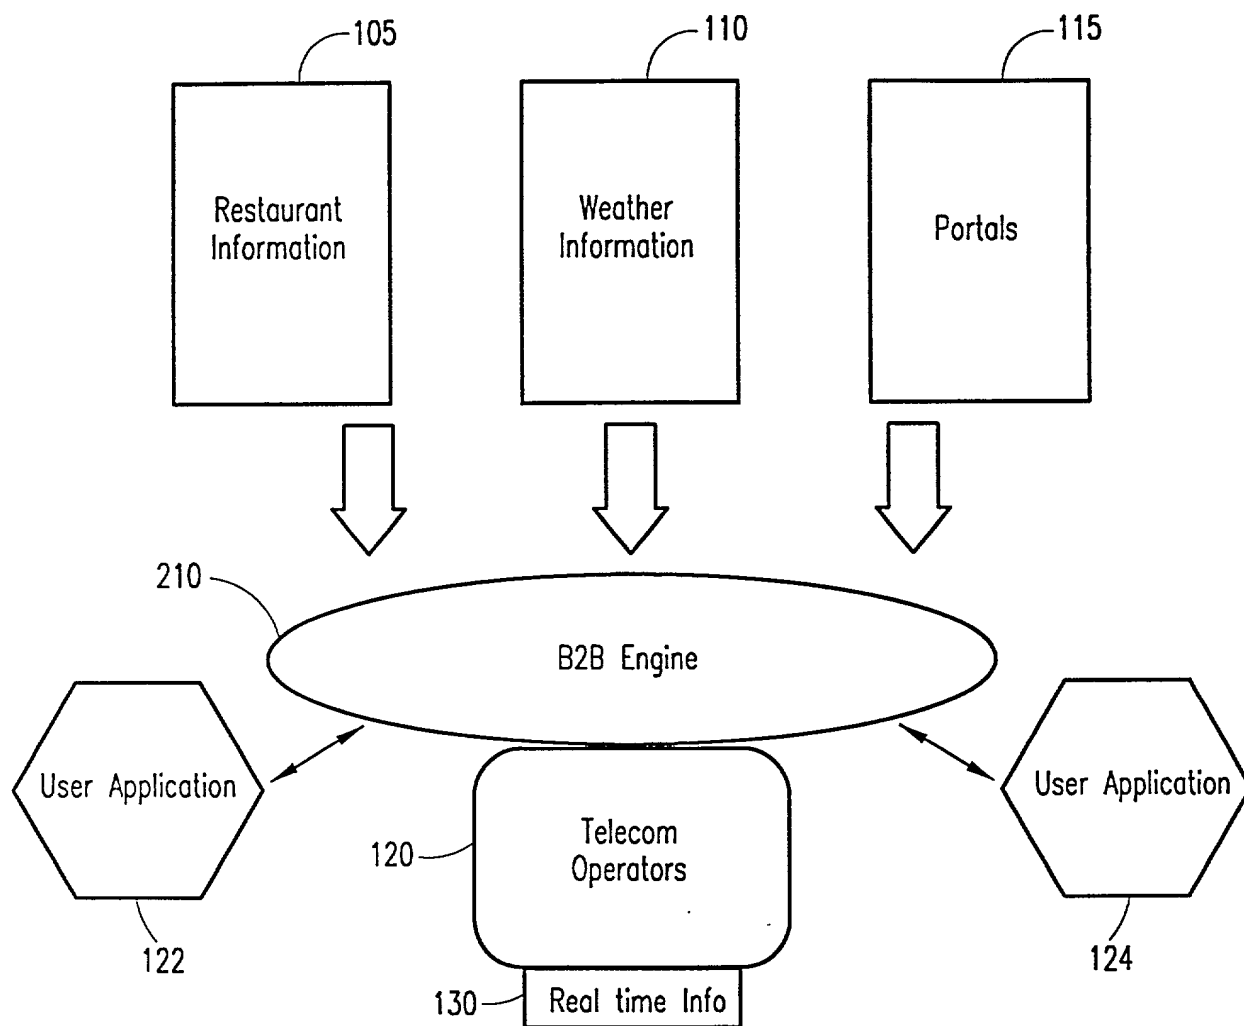


FIG. 3

FIG. 4

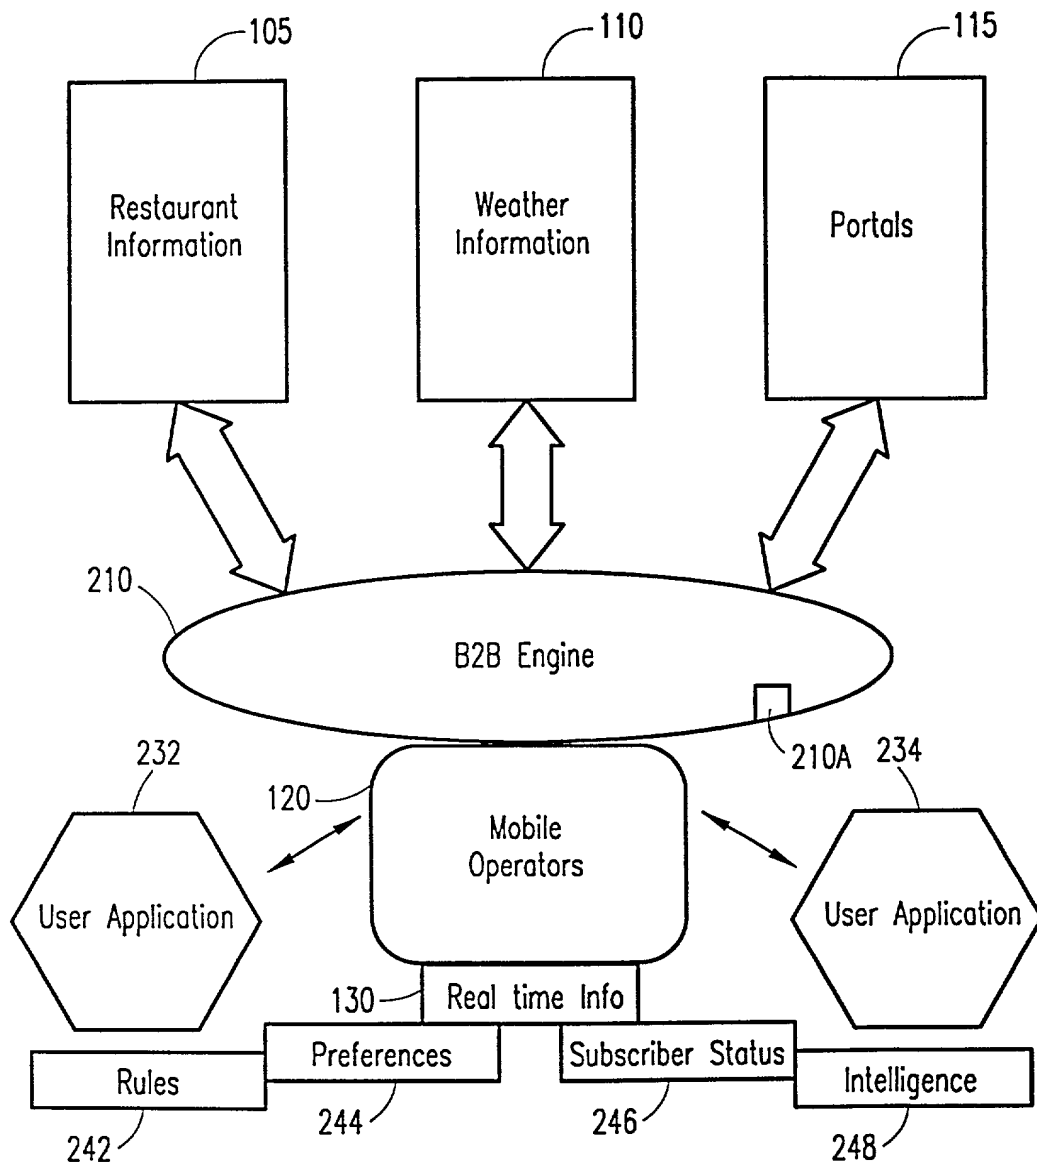


FIG. 4

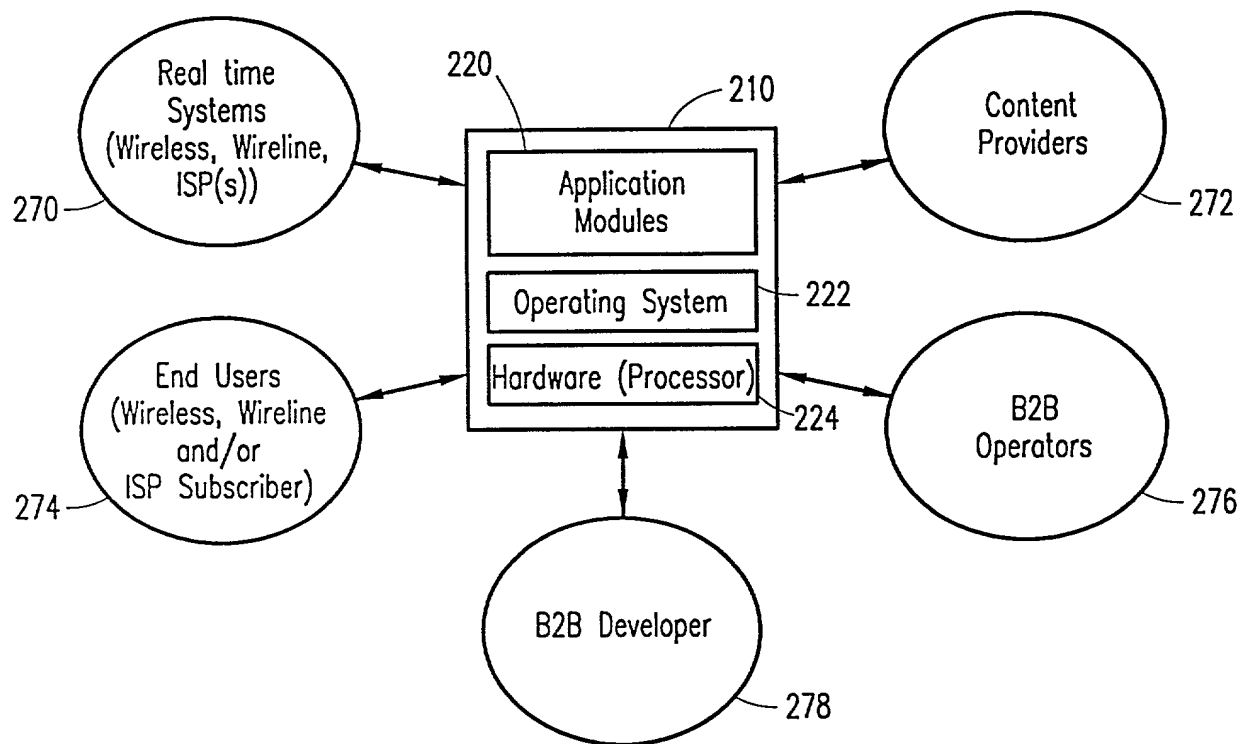


FIG. 5

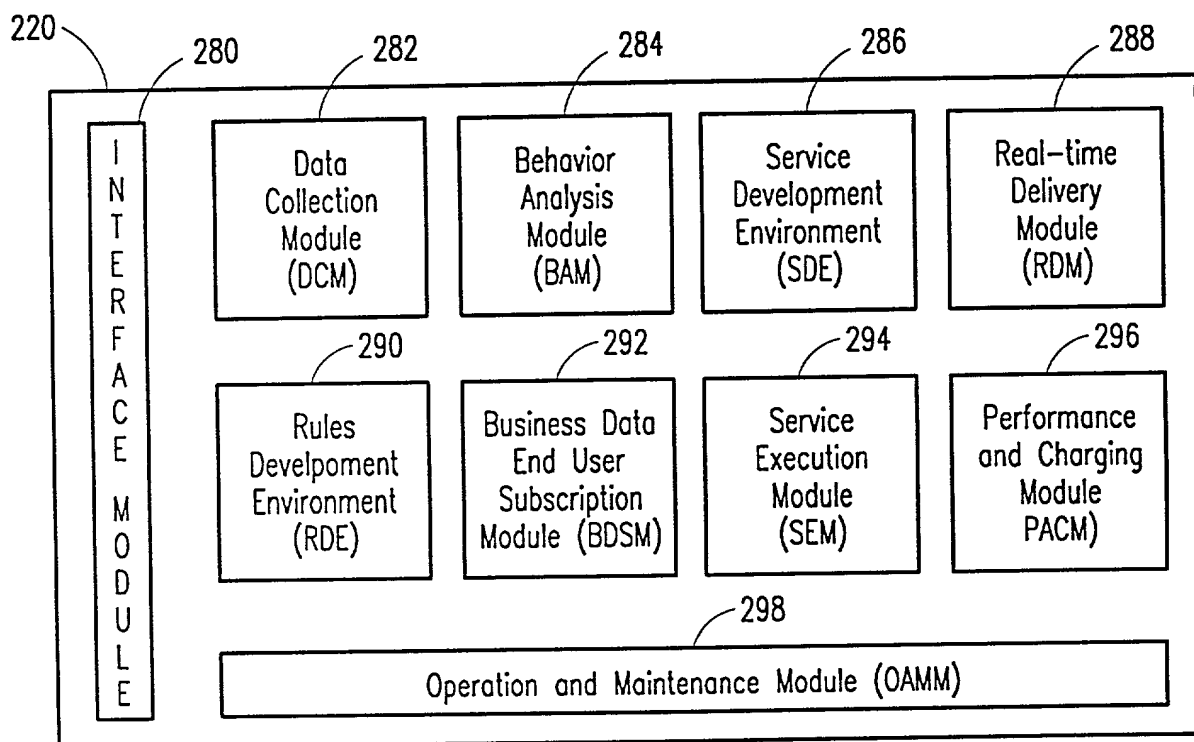


FIG. 6

FIG. 7

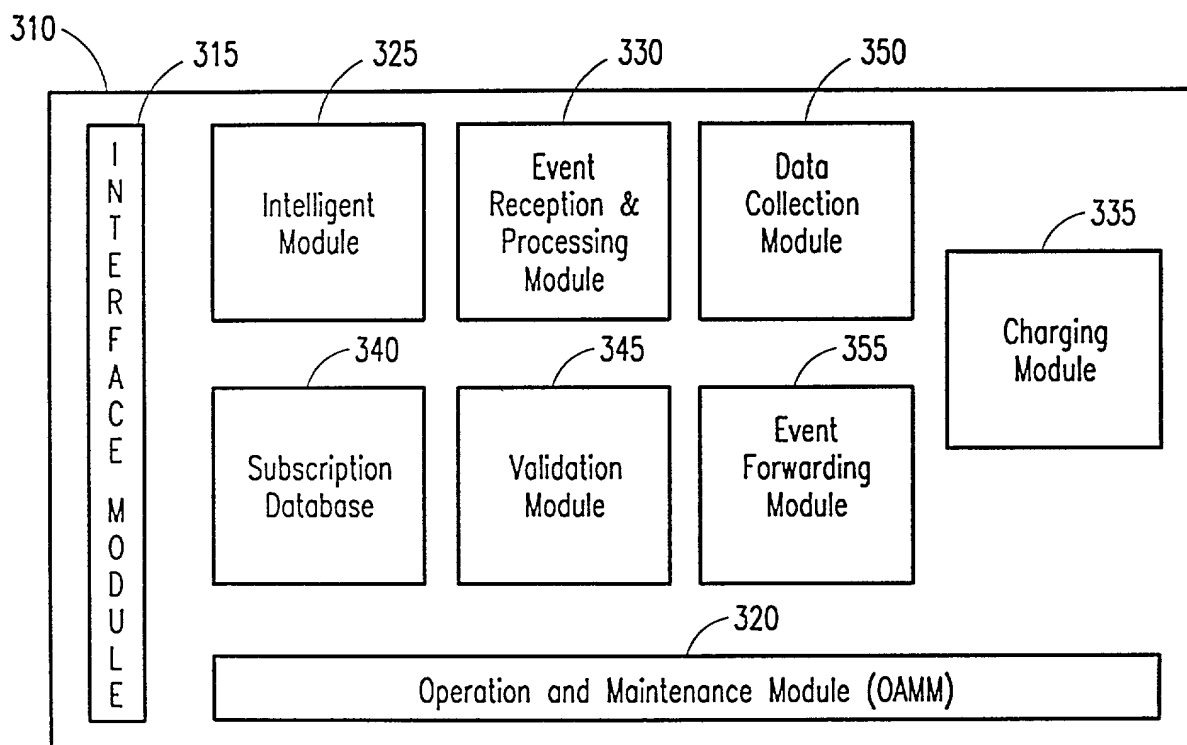


FIG. 7

360

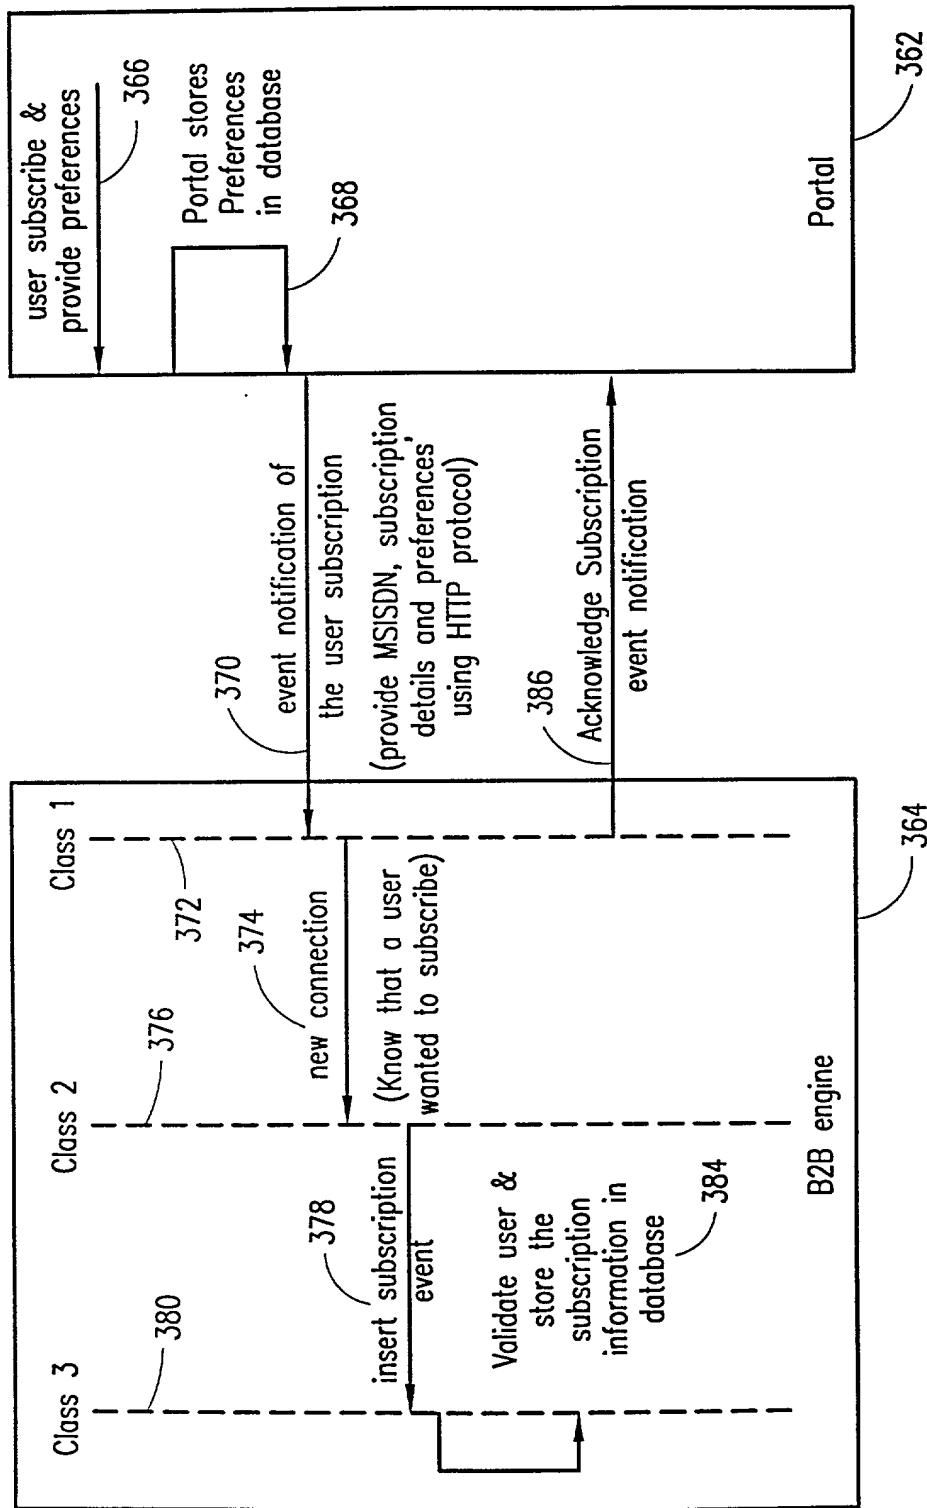


FIG. 8

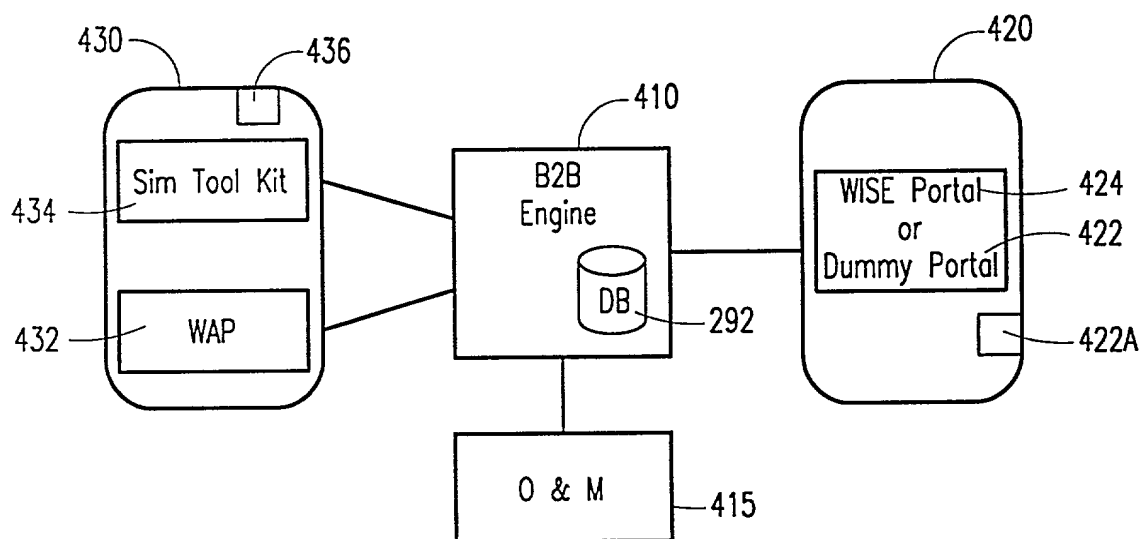


FIG. 9

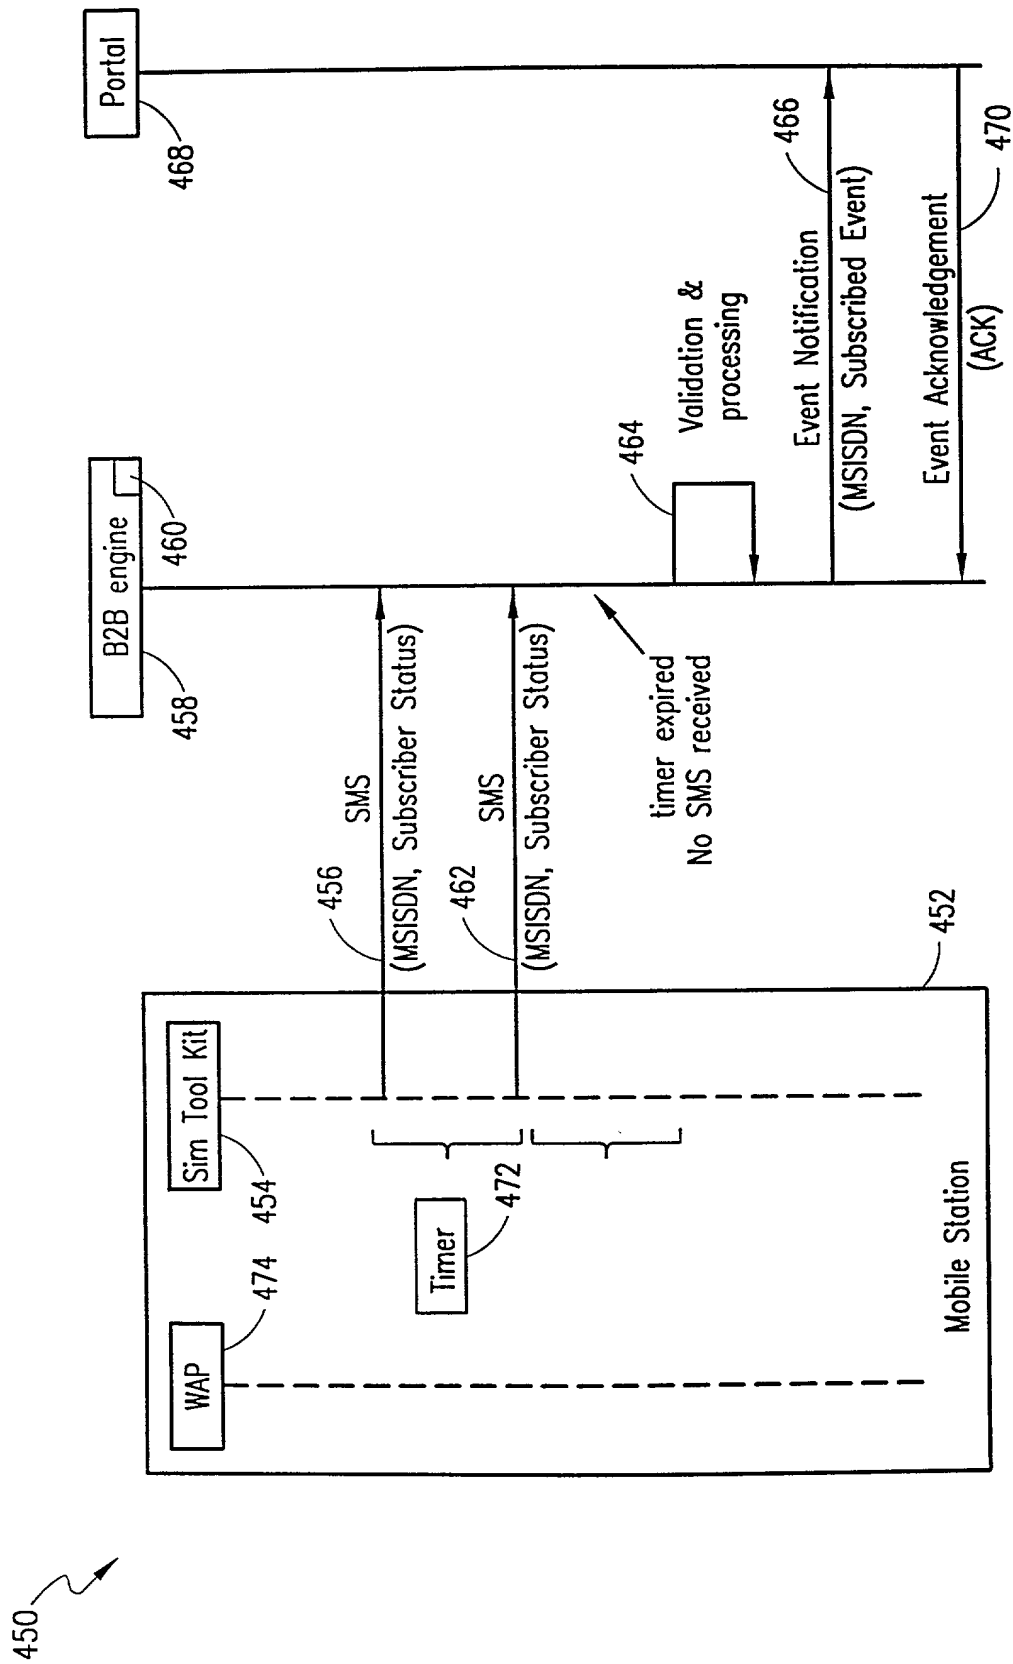


FIG. 10

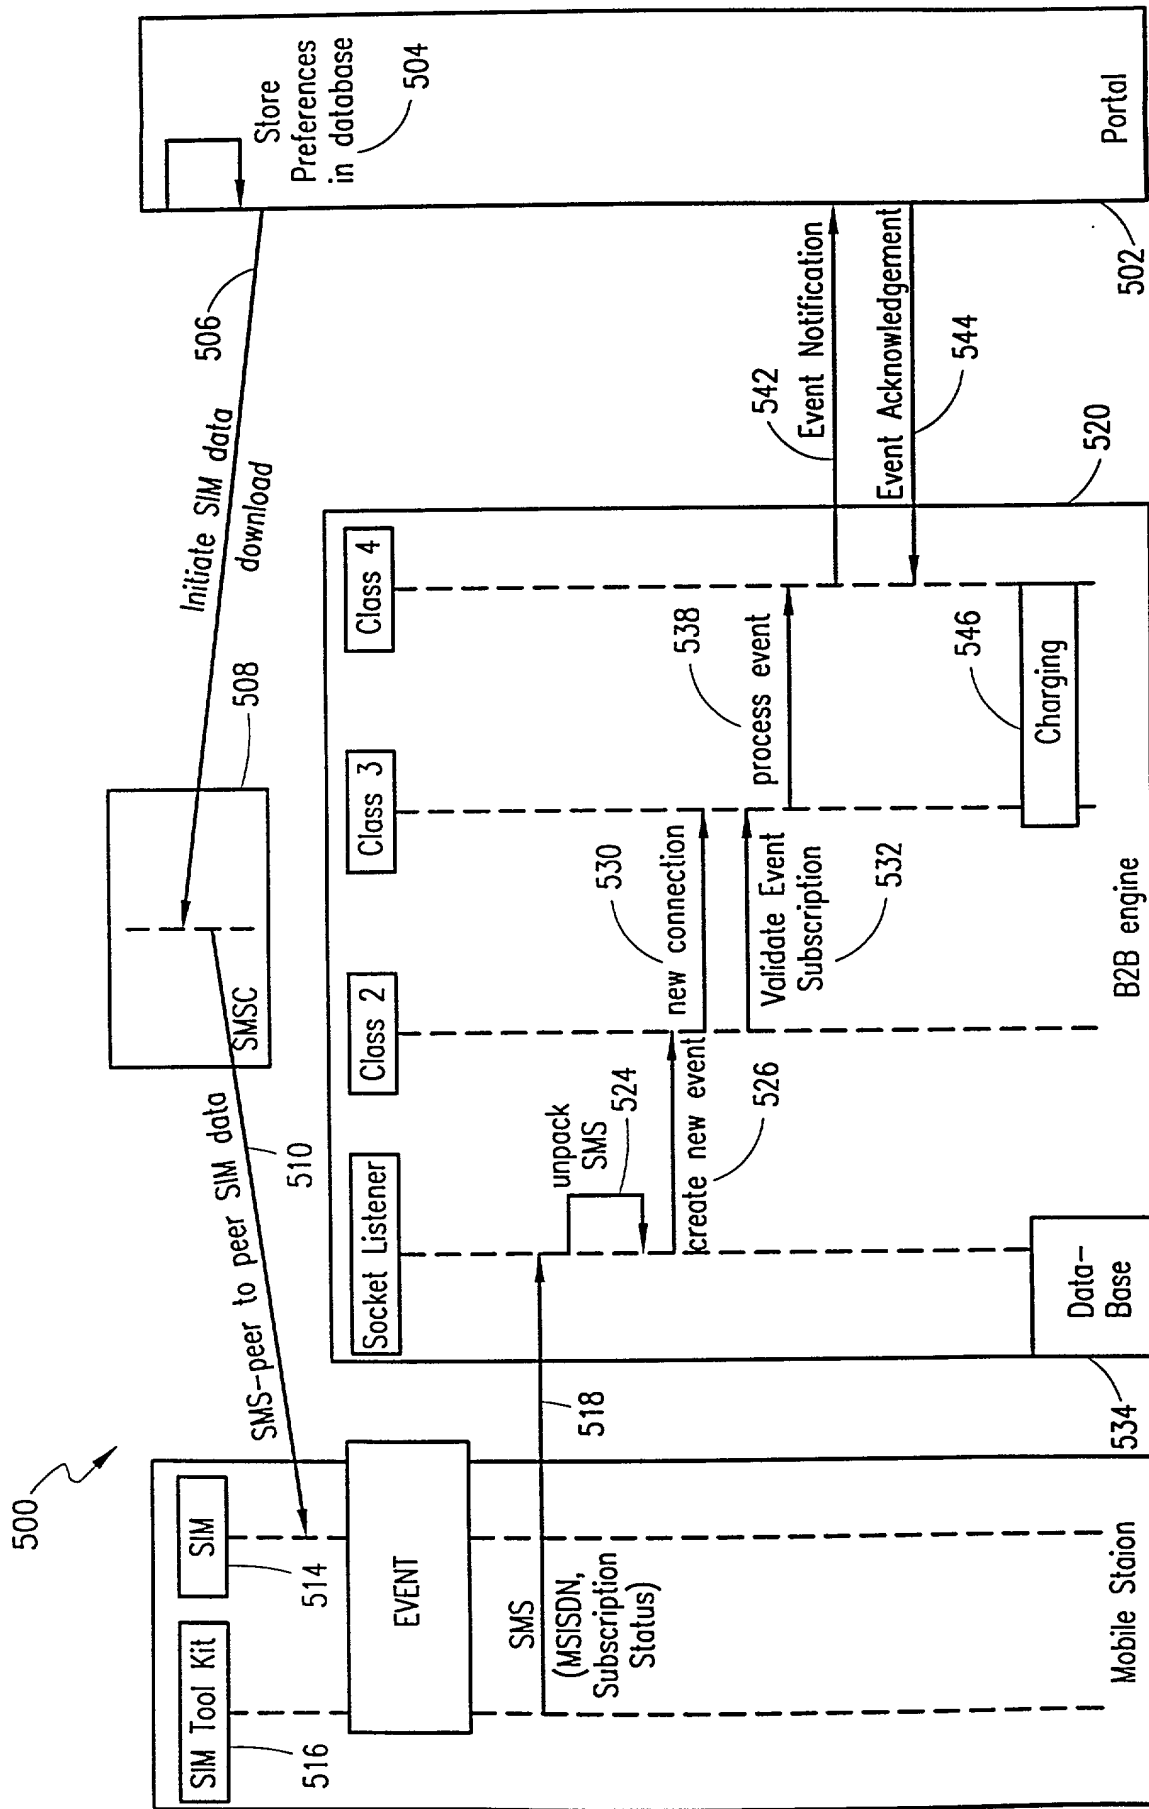


FIG. 11

FIG. 12

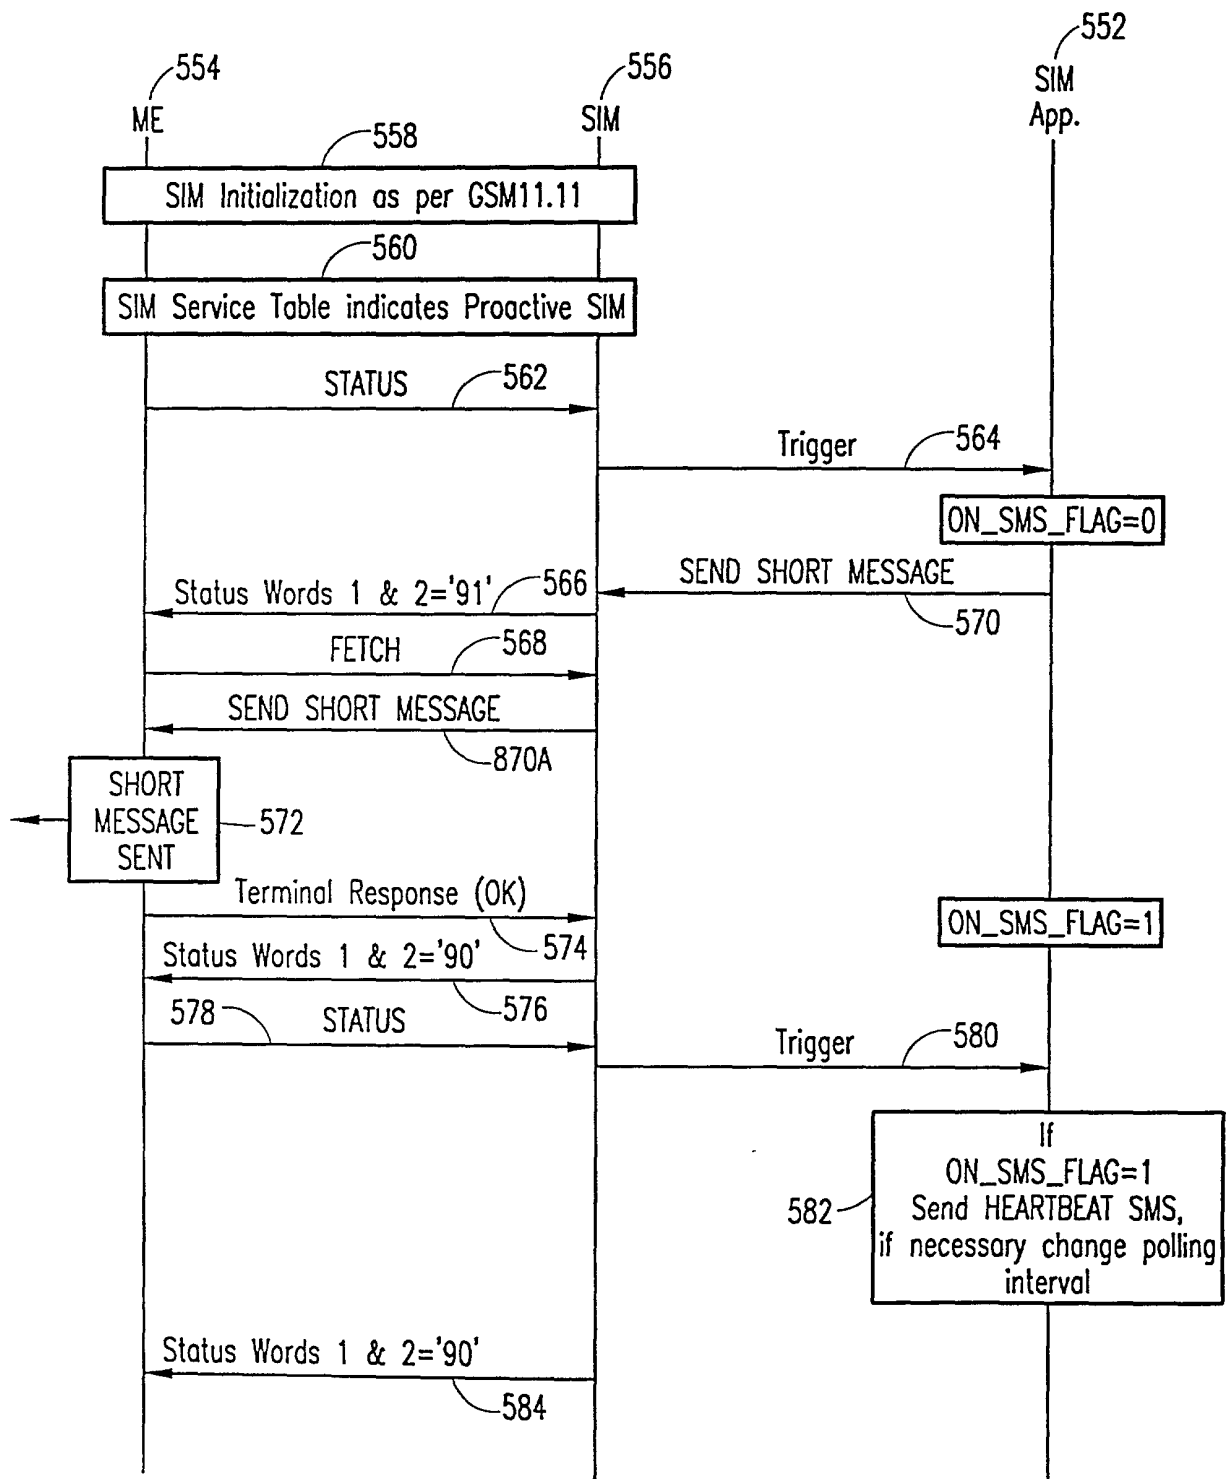


FIG. 12

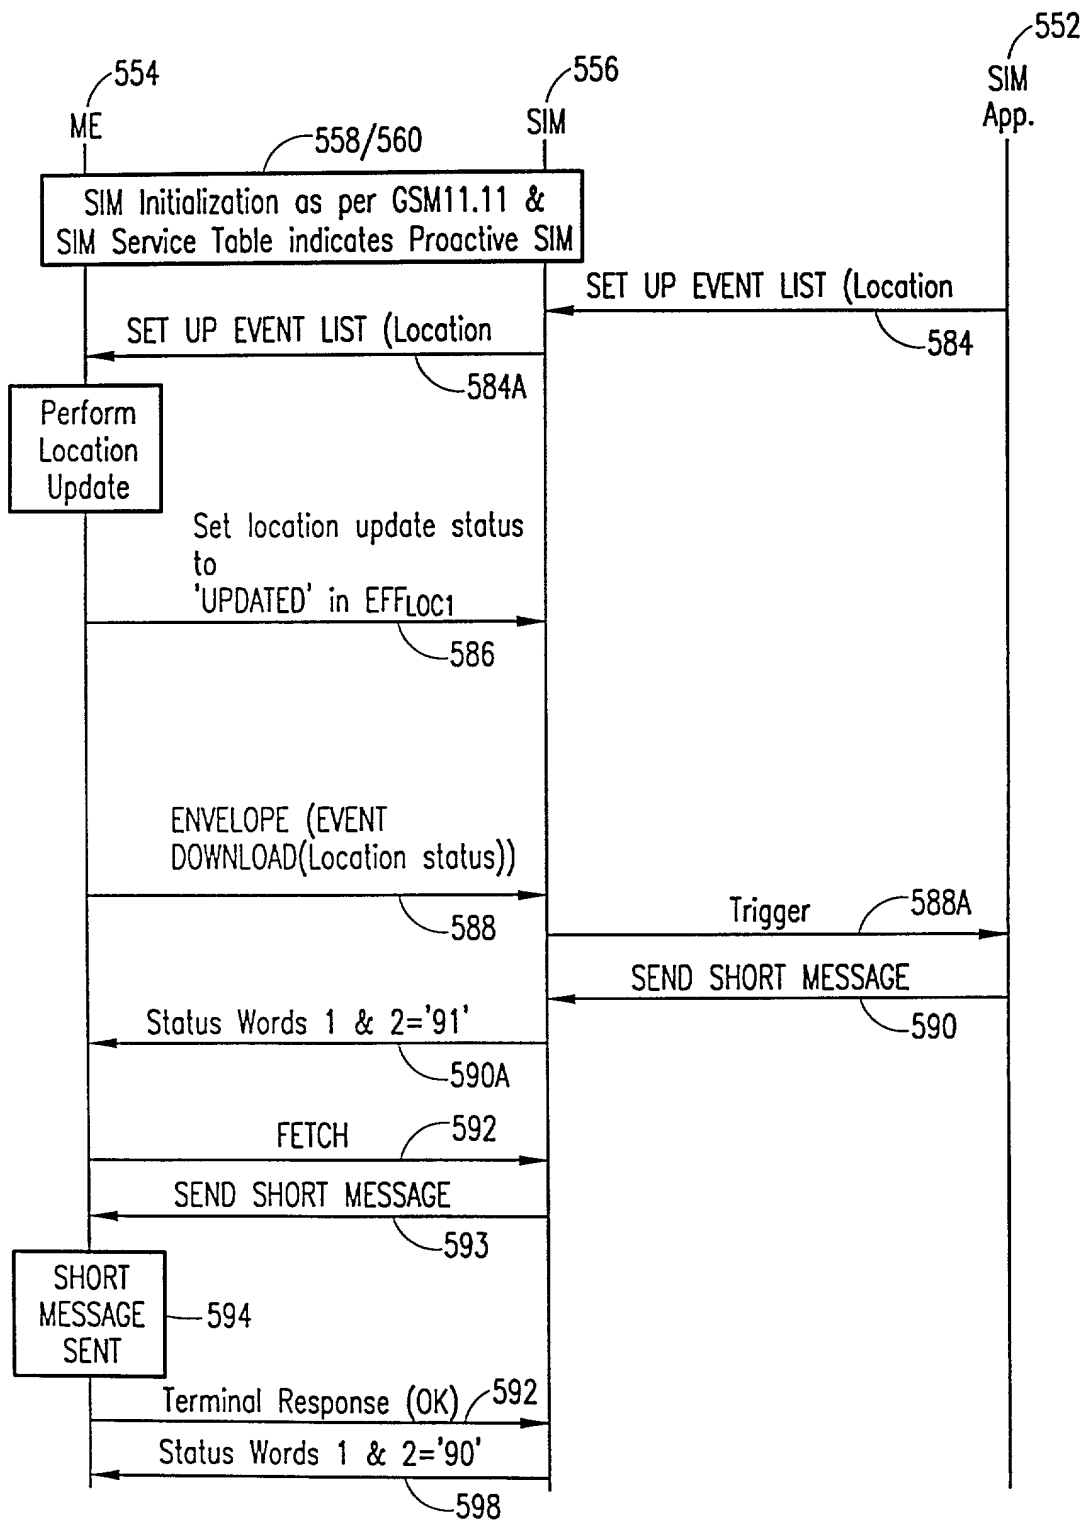


FIG. 13

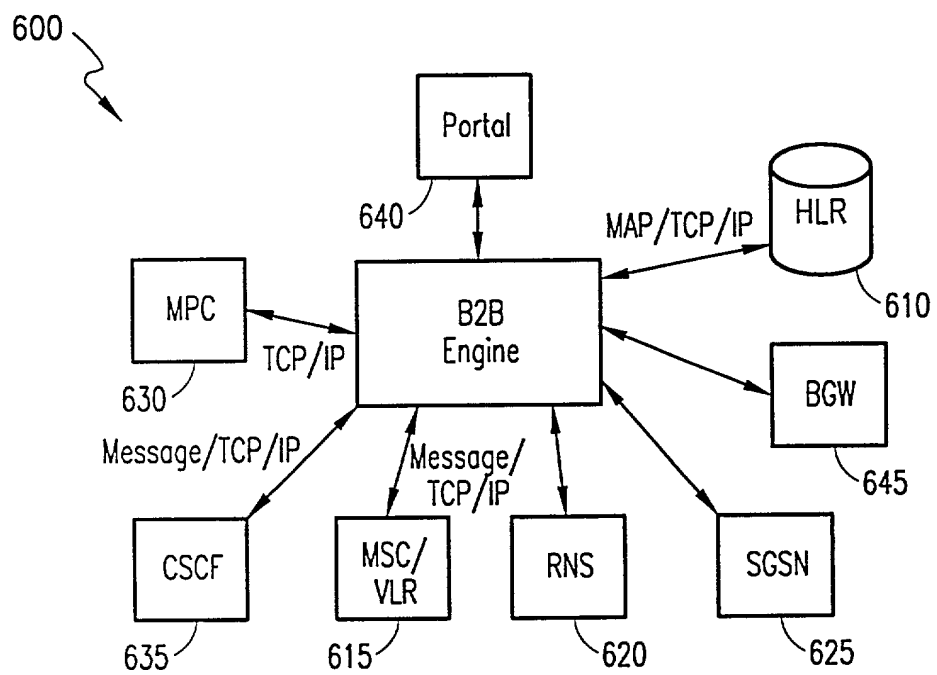


FIG. 14

FIG. 15

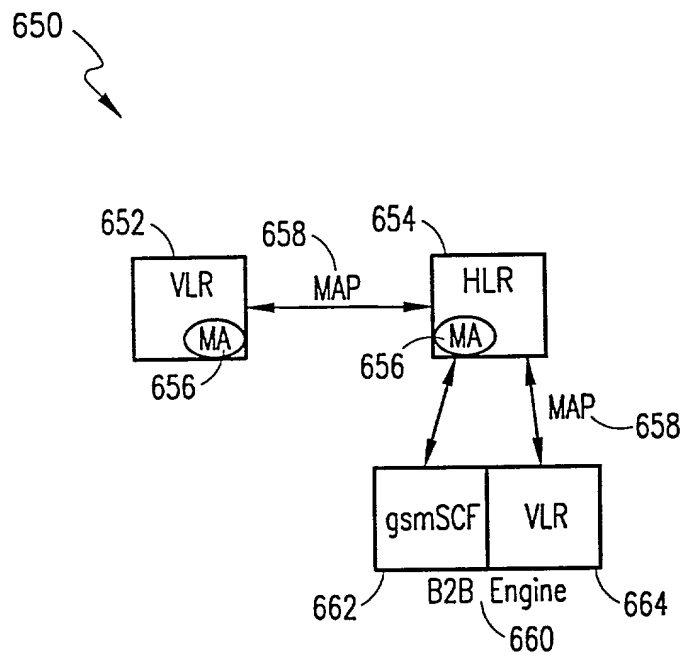


FIG. 15

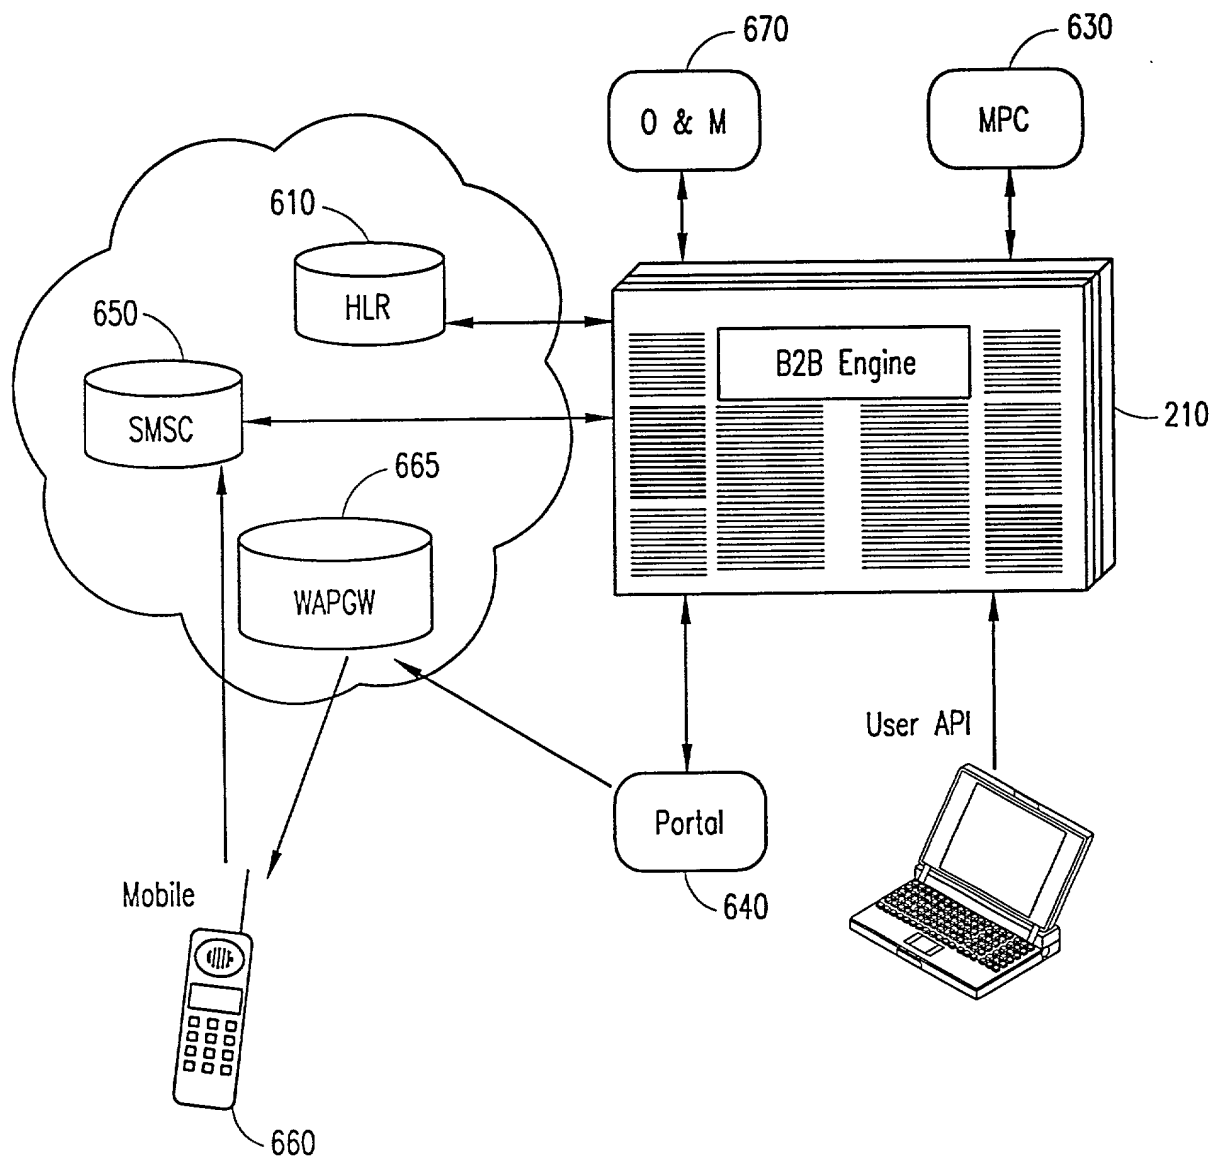


FIG. 16

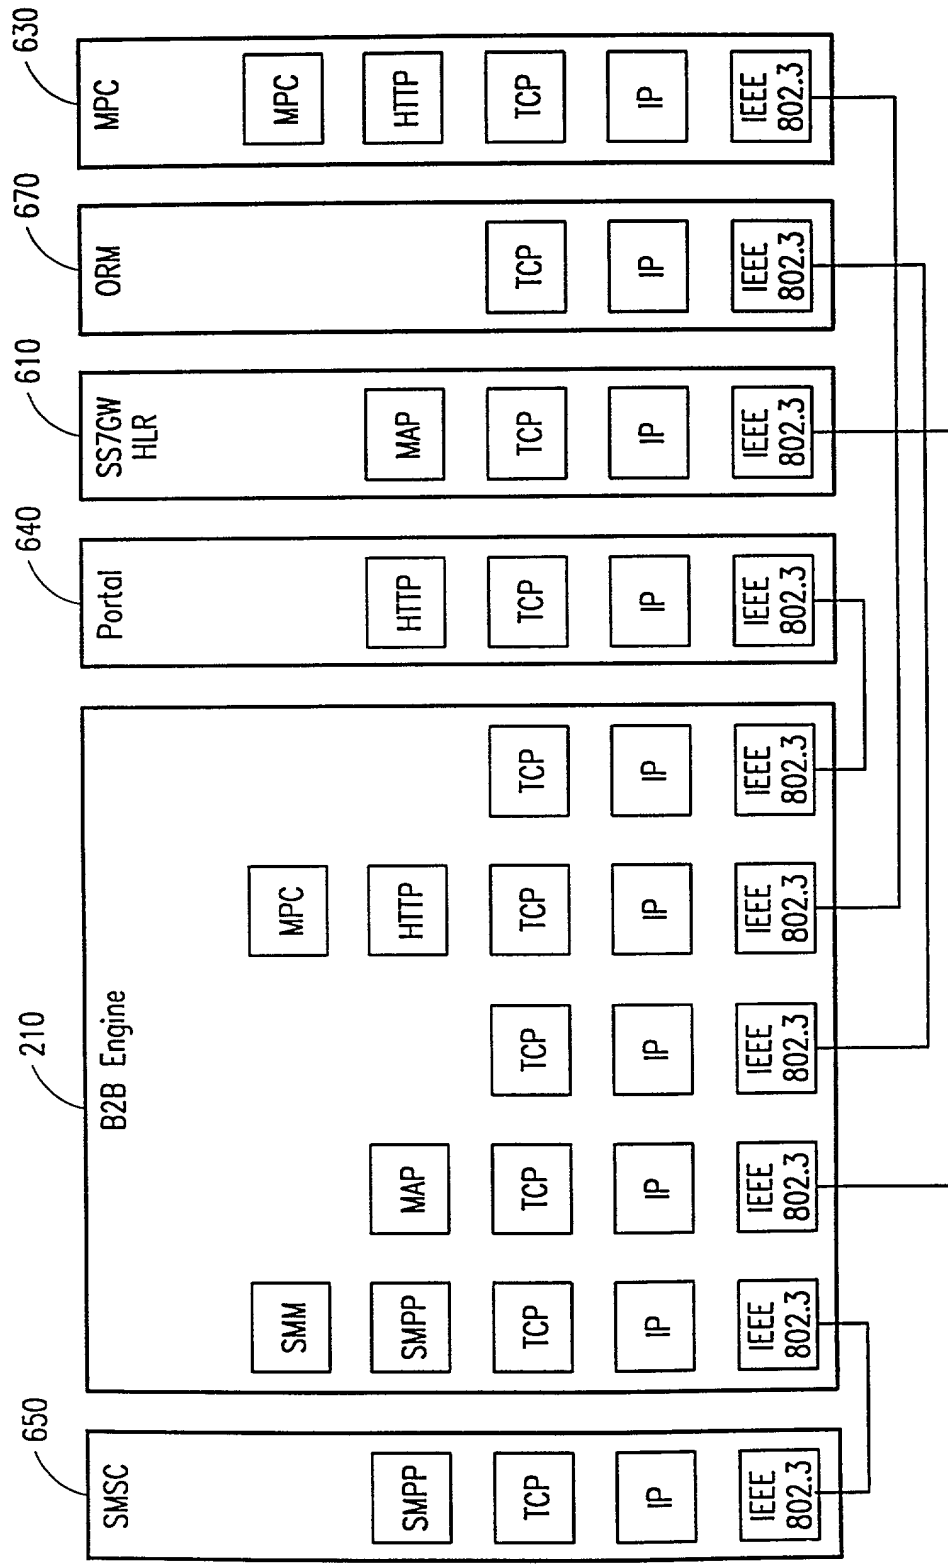


FIG. 17

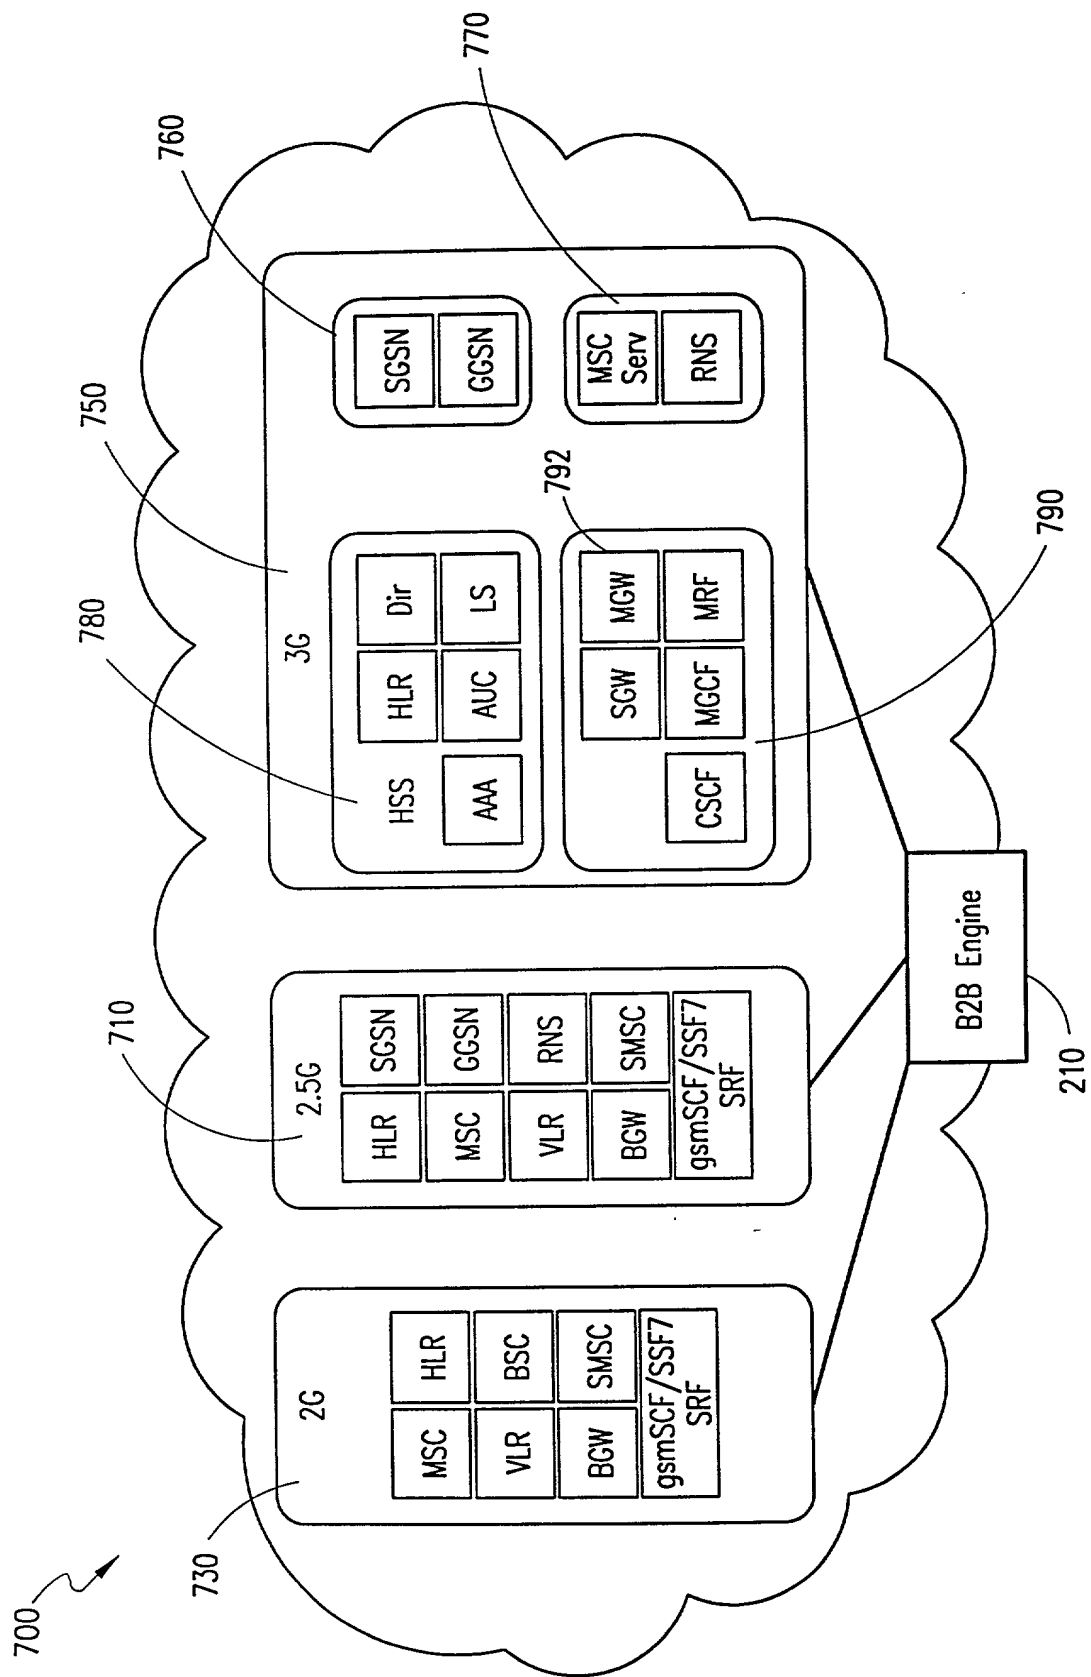


FIG. 18

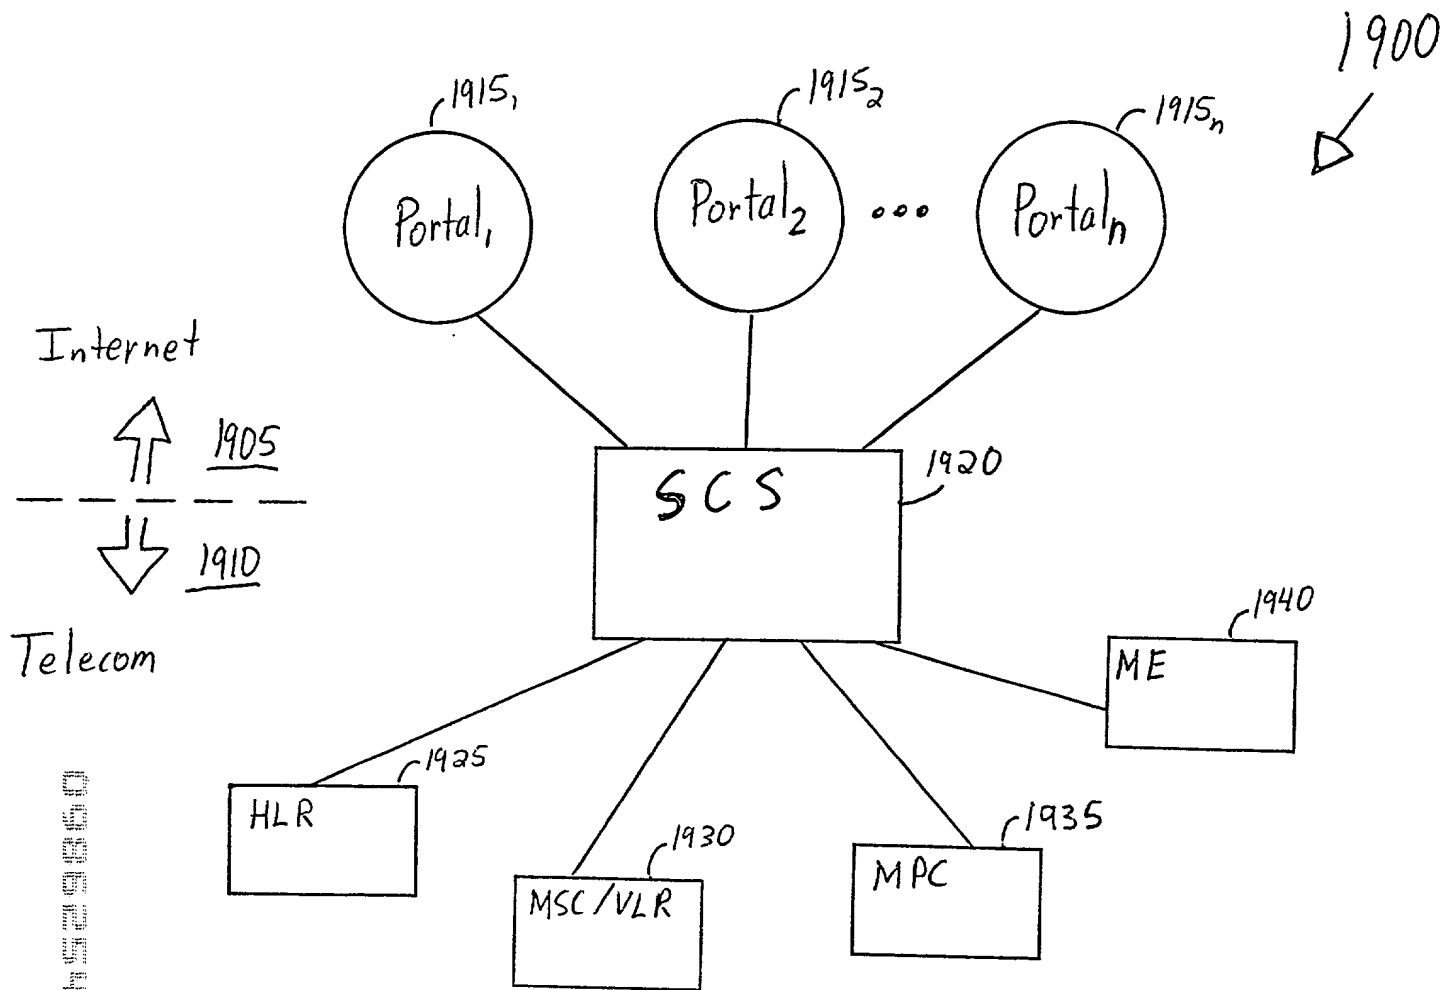


FIG. 19

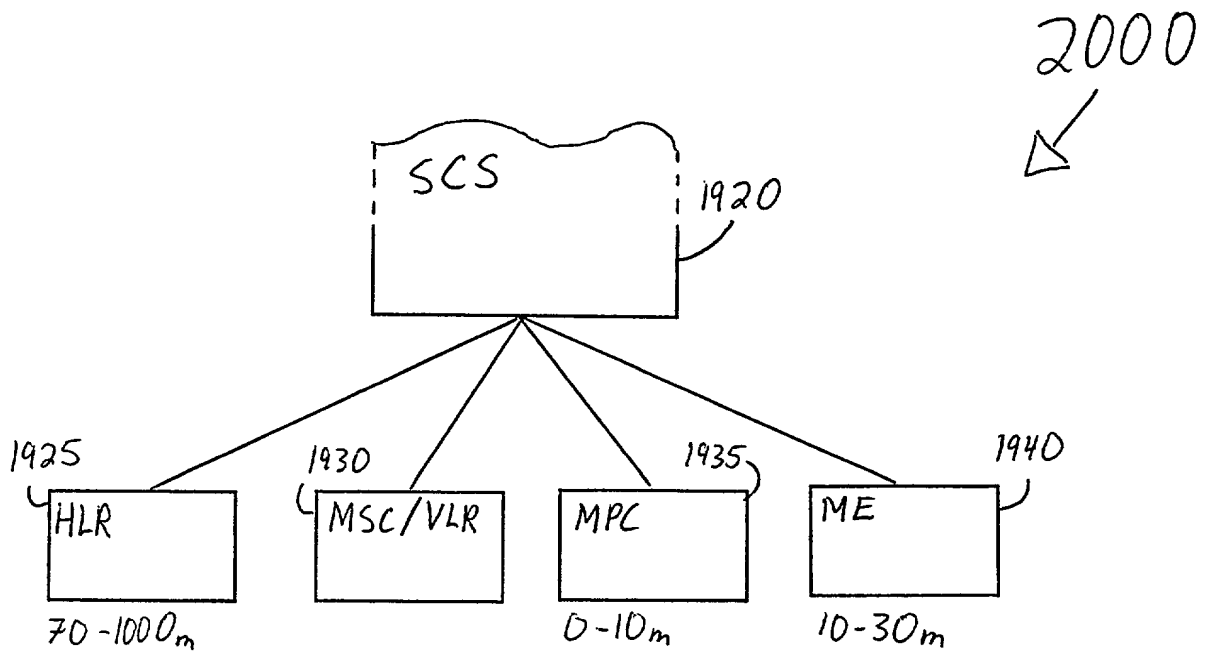


FIG. 20A

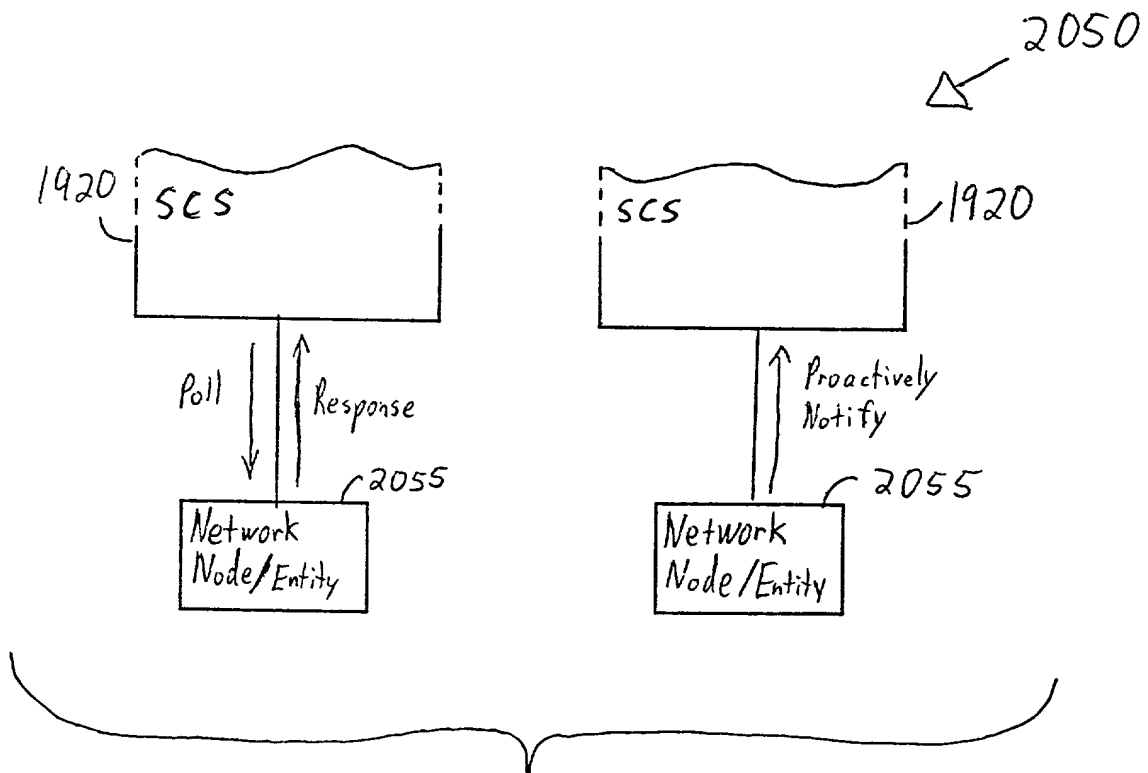


FIG. 20B

2/00



Service Class	Accuracy Range (m)	Response Time (ms)	Network Adapter
1	0-10	*	AdapterId1 (MPC)
2	10-30	3600	AdapterId2 (TIAP/SMS)
3	10-30	50	AdapterId3 (TIAP/USSD)
4	70-1000	*	AdapterId4 (HLR)
⋮	⋮	⋮	⋮
N	$X_1 - X_2$	Y	Adapter IdZ (Network Node/Entity)

FIG. 21

2200

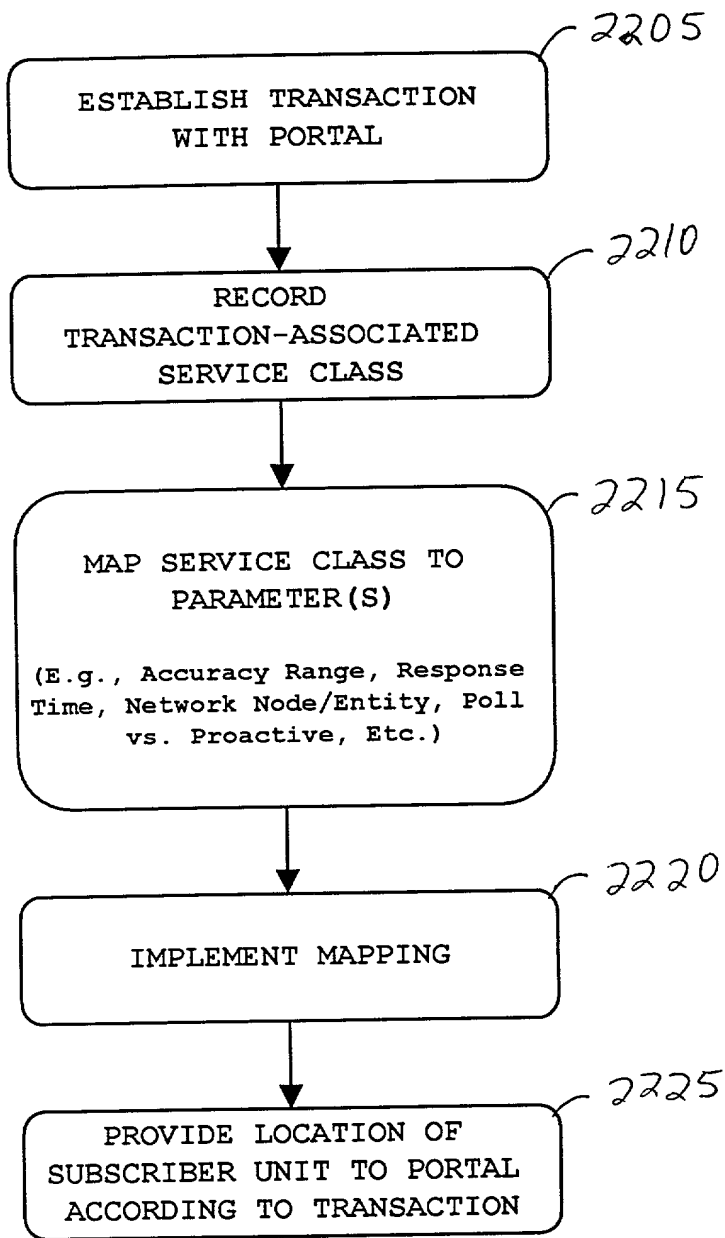


FIG. 22